



## A Series Electric Stock Picker

with a capacity of 1,000lbs



**HANGCHA**

**HC FORKLIFT AMERICA CORPORATION**

**Company address:**

10405-A Granite Street  
Charlotte, NC 28273

Toll Free: (888) 652-8395

Phone: (980) 888-8335

Fax: (980) 888-8336

[america@hcforklift.com](mailto:america@hcforklift.com)

[www.hcforkliftamerica.com](http://www.hcforkliftamerica.com)



2021 VERSION 1/COPYRIGHT 2021

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

***Making Material Handling Easier***  
SINCE 1956







## A Series Electric Stock Picker

The A Series Electric Stock Picker is designed to meet order fulfillment needs in narrow aisle environments. This stock picker has a comprehensive safety protection system, excellent ergonomics, and an advanced control system. Being reliable, comfortable, safe, and stable, all while providing excellent performance, it is perfect choice for increasing productivity in small load order fulfilling environments such as retail and manufacturing applications.

## Innovative Efficient Safe

### Performance

- / The brushless AC traction motor features excellent acceleration, outstanding climbing ability, low heat emission, and is maintenance-free.
- / The advanced CURTIS control system provides precise, smooth, and efficient control of the stock picker.
- / CANBUS structure allows for the whole vehicle to communicate faster and more reliably.








## Standard Specification

- / AC Traction Motor
- / CURTIS Controller
- / Front Load Tray
- / Foldable Rear Load Tray
- / Automatically Reduces Speed in Corners
- / CURTIS Multi-Dunction Instrument Display
- / Maintenance-Free Battery
- / Battery Locking Mechanism
- / Built-in Charger
- / Emergency Cut Off Switch
- / Safety Pedal
- / Tilt Switch
- / Left and Right Guardrail
- / Back Cushion
- / Electromagnetic Brake

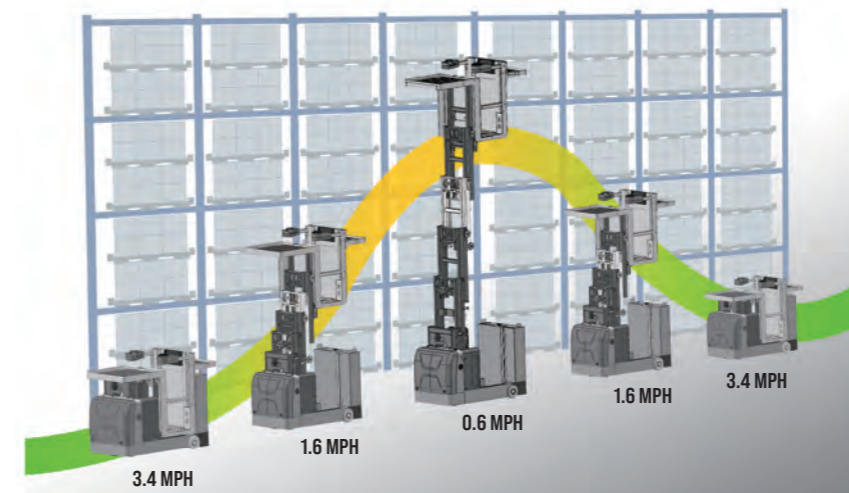

## Simultaneous Travel and Lift

With productivity in mind, Hangcha designed the stock picker to travel and lift simultaneously. This allows operators to move around a facility while raising or lowering the stock picker to their desired height in one smooth, seamless operation. The truck reaches a maximum speed of 3.4 mph and adjusts speed based on lift height.

## Comfort

- / The truck is designed for smooth lifting, lowering, and stability when stock picking to reduce operator fatigue.
- / Lifting & lowering of the mast are buffered to enable more comfort.
- / CURTIS multi-function instruments include functions such as mode selection and wheel position. The instruments also clearly display various information about the order picker.

## Maintenance


- / The brushless AC motor is maintenance-free. This saves the end-user time and money.
- / The integrated display shows remaining power, advanced diagnostics and timing for convenience when operating and maintaining the stock picker.
- / The rear hood can be easily removed. This is convenient for maintenance of the hydraulic unit, electric control, motor, and other parts.

## Reliability

- / The vehicle's frame is robust and reliable thanks to its high-strength steel frame structure.
- / All of the stock picker's wires and cables are protected. This greatly improves the reliability of the electrical system.
- / Switches, connectors, instruments, and other key parts are all high-quality products with excellent performance and quality.

## Safety

- / The low mast provides the operator with perfect visibility.
- / The controller offers limits the stock picker's speed when cornering to ensure smooth and safe operation.
- / The safety pedals include a sensor to ensure the operator has their feet properly positioned on the platform. It automatically stops travel, lift, and lower functions if the operator doesn't have their foot on the pedal.
- / The hydraulic system has an emergency manual lowering valve that can be operated from the rear of the stock picker to lower the platform.

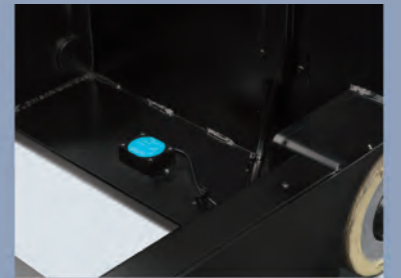

The tilt sensor prevents the vehicle from tipping over due to excessive slope and ensures operator safety.



The rear load tray can be folded to allow for working in a confined space.



Battery side roll out and built-in charger are standard features of the stock picker. This allows for easy battery replacement and convenient charging.



The large front and rear trays greatly improve the operator's efficiency.



The guardrails are equipped with detection switches. The stock picker will not work until the guardrails are put up.

# A Series Electric Stock Picker Specification

Distinguishing Marks	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.	
		HCFA Model		OPM05	
	1.2	Model		CJD05-AC1-MNA	
	1.3	Drive: electric (battery or mains),diesel,petrol,fuel gas		Electric	
	1.4	Operator Type: hand, pedestrian, standing, seated, order-picker		Order picker	
	1.5	Rated Capacity on Front Tray	Q <sub>f</sub> (lb/kg)		550/250
		Rated Capacity on Rear Tray	Q <sub>r</sub> (lb/kg)		220/100
Rated Capacity on Standing Tray		Q <sub>s</sub> (lb/kg)		330/150	
1.9	Wheelbase	y(in/mm)		45.3/1150	
Weight	2.1	Service Weight	lb/kg	3216/1460	
Tires & Chassis	3.1	Tires: solid rubber, superelastic, pneumatic, polyurethane		Polyurethane/Rubber	
	3.2	Tire Size, driving wheels	in/mm	Ø9×3/Ø230×75	
	3.3	Tire Size, loading wheels	in/mm	Ø8×3/Ø204×76	
		Tire Size, caster wheels	in/mm	Ø5×2/Ø125×50	
	3.5	Wheels, number driving, caster/loading (x=drive wheels)		1x.2/2	
Dimensions	4.2	Height, mast lowered	h <sub>1</sub> (in/mm)	57.8/1468	
	4.4	Lift	h <sub>3</sub> (in/mm)	145.7/3700	
	4.5	Height, mast extended	h <sub>4</sub> (in/mm)	203.5/5168	
	4.8	Seat Height/Standing Height	h <sub>5</sub> (in/mm)	11.8/300	
	4.19	Overall Length	h(in/mm)	61.6/1564	
	4.21	Overall Width	b <sub>1</sub> /b <sub>2</sub> (in/mm)	31.5/31.5,800/800	
	4.31	Ground Clearance, laden, below mast	m <sub>1</sub> (in/mm)	1.4/35	
		Initial Height of Front Tray	h <sub>2</sub> (in/mm)	46/1168	
		Initial Height of Rear Tray	h <sub>5</sub> (in/mm)	45.5/1156	
		Front Tray Size	l <sub>20</sub> ×b <sub>20</sub> (in/mm)	27.6×31.5,700×800	
		Behind Tray Size	l <sub>21</sub> ×b <sub>21</sub> (in/mm)	16×31.5,407×800	
		Channel Width	A <sub>st</sub> (in/mm)	79.7/2025	
	4.35	Turning Radius	W <sub>a</sub> (in/mm)	52.9/1343	
	Performance Data	5.1	Travel Speed, laden/unladen	mph km/h	3.4/3.4 5.5/5.5
		5.2	Lift Speed, laden/unladen	fpm mm/s	31.5/41.4 160/210
5.3		Lowering Speed, laden/unladen	fpm mm/s	45.3/42.4 230/215	
5.7		Gradeability, laden	%	5	
5.10		Service Brake		Electromagnetic	
Electric Motor	6.1	Drive Motor Rating S2 at 60 min	hp/kw	2/1.5	
	6.2	Lift Motor Rating S3 at 15 %	hp/kw	3/2.2	
	6.4	Battery Voltage/Nominal Capacity K3	V/Ah	24/200	
	6.5	Battery Weight	lb/kg	430/195	
Additional Data	10.7	Sound Pressure Level at the Driver's Seat	dB(A)	69	
Others	11.1	Type of Drive Control		Curtis AC	

Optional:  
 1. Lift h<sub>3</sub>=116.5in/2960mm  
 2. Optional Larger Battery Capacity: 24V/300Ah, lead-acid

